


Inductive Standard Displacement Transducers

Special features


- Available as displacement probe or with detachable plunger
- Good thermal stability in the event of temperature gradients
- Space-saving, compact design
- Pressure-resistant transducer for measuring displacement in hydraulic cylinders
- Acceleration resistance ensures long service life
- Option: high temperature version up to 150°C, low temperature version up to -40°C
- Output signal of your choice: 80 mV/V, 0.5 - 10 V



Dimensions (in mm; 1 mm = 0.0397 inches)

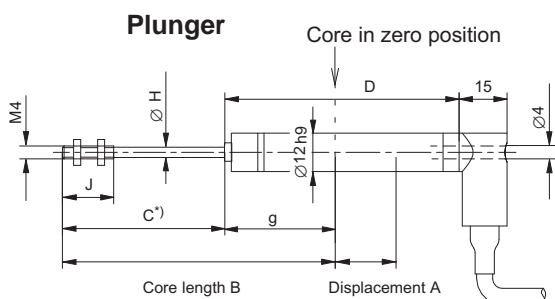

Fitted PVC cable, Ø6, optional length and termination

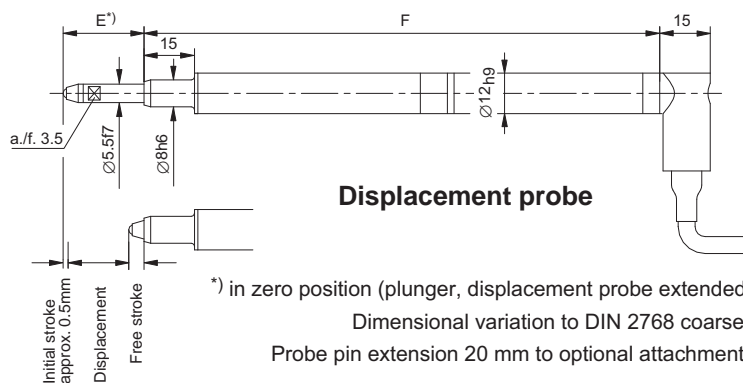

Dimensional variation to DIN 2768 coarse
Probe pin extension 20 mm to optional attachment

Measuring range	Plunger							Displacement probe		
	A	B	C	D	G	ØH	J	A	E	F
0...2 mm	2	75.5	40	69	35.5	1.2	15	2	14	130
0...10 mm	10	66	40	69	26 ± 0.5	3.7	16	10	14	130
0...20 mm	20	87	55	84	32 ± 0.5	3.7	16	20	24	170
0...50 mm	50	117	85	114	32 ± 0.5	3.7	16	50	54	230
0...100 mm	100	180	134	181.6	46 ± 1	3.7	16	100	104	372.6
0...200 mm	200	280	234	281.6	46 ± 1	3.7	16			
0...300 mm	300	380	334	381.6	46 ± 1	3.7	16			
0...500 mm	500	580	534	581.8	46 ± 1	3.7	16			

Specifications


Type		WA2	WA10	WA20	WA50	WA100	WA200	WA300	WA500
Nominal displacement	mm	0...2	0...10	0...20	0...50	0...100	0...200	0...300	0...500
Nominal sensitivity Nominal output signal at nominal displacement with output unloaded	mV/V	80							
Characteristic tolerance Deviation of sensitivity from nominal sensitivity	%	± 1							
Zero point tolerance with core in zero position	mV/V	± 1							± 8
Linearity deviation Greatest deviation between start and end point (including hysteresis by reference to nominal sensitivity)	%	≤ ± 0.2 to ≤ ± 0.1							
Nominal temperature range	°C [°F]	-20...+80							
Operating temperature range Standard	°C [°F]	-25...+80 [-13...+176]							
Variant for high temperature	°C [°F]	-25...+150 [-13...+302]							
Variant for low temperature	°C [°F]	-40...+125 [-40...+257]							
Effect of temperature on zero signal in nominal temp. range per 10 K, by refer. to nominal sensitivity	%	< ± 0.1							
Effect of temperature on output signal in nominal temp. range per 10 K, by refer. to actual value	%	< ± 0.1							
Input resistance	Ω	100 ± 10 %							350 ± 10 %
Output resistance	Ω	570 ± 10 %							680 ± 10 %
Nominal excitation voltage	V _{rms}	2.5							
Operating range of the excitation voltage	V _{rms}	0.5...10							
Carrier frequency, Nominal range	kHz	4.8 ± 1 %							
Operating range	kHz	4.8 ± 8 %							
Weight of transducer body	g	54	56	57	68	104	147	190	276
of plunger	g	4	6	7	9	13	20	28	42
Impact resistance , test severity level to DIN IEC 68, Part 2-27; IEC 68-2-27-1987 Number of impacts (per direction)	-	1000							
Impact acceleration	m/s ²	650							
Impact duration	ms	3							
Impact form	-	Half sine wave							
Vibration resistance , test severity level to DIN IEC 68, Part 2-6, IEC 68-2-6-1982 Frequency range	Hz	5 to 65							
Vibration acceleration	m/s ²	150							
Stress duration (per direction)	h	0.5							
Max. permissible plunger acceleration	m/s ²	2500							
	m/s ²	Probe version						Unfixed plunger version	
Service life, typically		10 million stress cycles						-	
Spring constant	N/mm	0.116				0.063		-	
Spring force in zero position (for 1mm initial stroke) approx.	N	2.4				2		-	
Spring force in final position (nom. displ.) appr.	N	2.7	3.6	4.7	8.2	8.3	-		
Max. permissible probe tip acceleration	m/s ²	170		140	95	45	-		
Probe tip cut-off frequency for 1 mm stroke appr.	Hz	60		55	45	30	-		
Probe tip cut-off frequency at nominal displacement	Hz	18		10	5	3	-		
Degree of protection acc. to EN 60 529 for transducer duct and core channel	-	IP67 (depending on connection piece)							
Max. permissible pressure (increasing load)	bar	350							
Overload limit (to VDI/VDE 2600, Sheet 4)	bar	450							
Destructive range (to VDI/VDE 2600, Sheet 4)	bar	> 500							

Specifications WA electronics

Type		WA2	WA10	WA20	WA50	WA100	WA200	WA300	WA500
Nominal displacement	mm	0...2	0...10	0...20	0...50	0...100	0...200	0...300	0...500
Nominal output span ¹⁾	V	9.5 (0.5...10)							
Output span tolerance ¹⁾	%	±0.5							
Linearity deviation ¹⁾ Greatest deviation between start and end point (including hysteresis by reference to nominal sensitivity)	%	±0.2							
Nominal temperature range	°C	-20...+60							
Operating temperature range	°C	-20...+70							
Effect of temperature ¹⁾ on zero signal in nominal temperature range per 10 K, by reference to nominal sensitivity	%	≤ ±0.2; typically ≤ ±0.15							
Effect of temperature ¹⁾ on output signal in nominal temperature range per 10 K, by reference to actual value	%	≤ ±0.15; typically < ±0.10							
Supply voltage	V	15...30							
Dependence of the nominal (rated) output range from the supply voltage, typically (in the supply voltage range)	%	0.03							
Burden in the output	kΩ	≥10							
Current consumption	mA	45 (typically 26)							
Power consumption max.	W	1.5							
Cut-off frequency	Hz	520 filter 4th order, Butterworth							
Max. cable length between transducer and electronics	m	20							
Max. cable length between electronics and evaluator	m	50							

¹⁾ Specified for the complete measuring chain


WA electronics

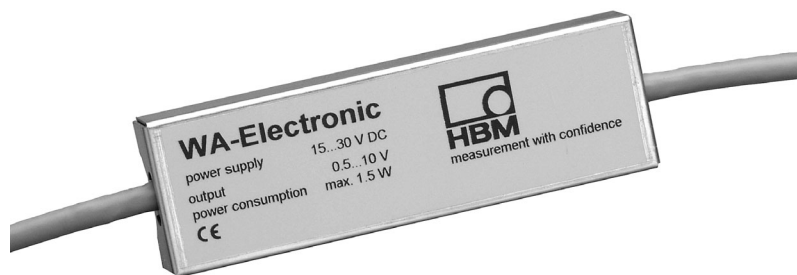


Dimensions WA electronics

Length: 102 mm
Width: 32 mm
Depth: 13.5 mm


WA electronics cable assignment

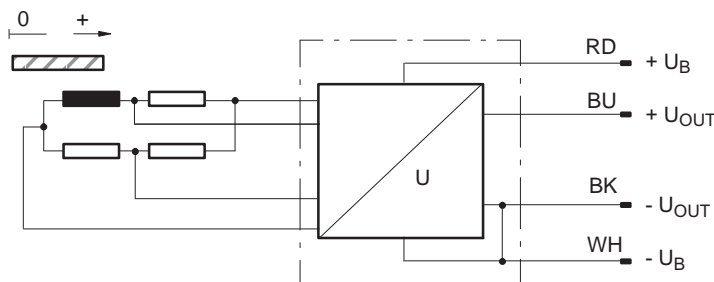

Types of connection

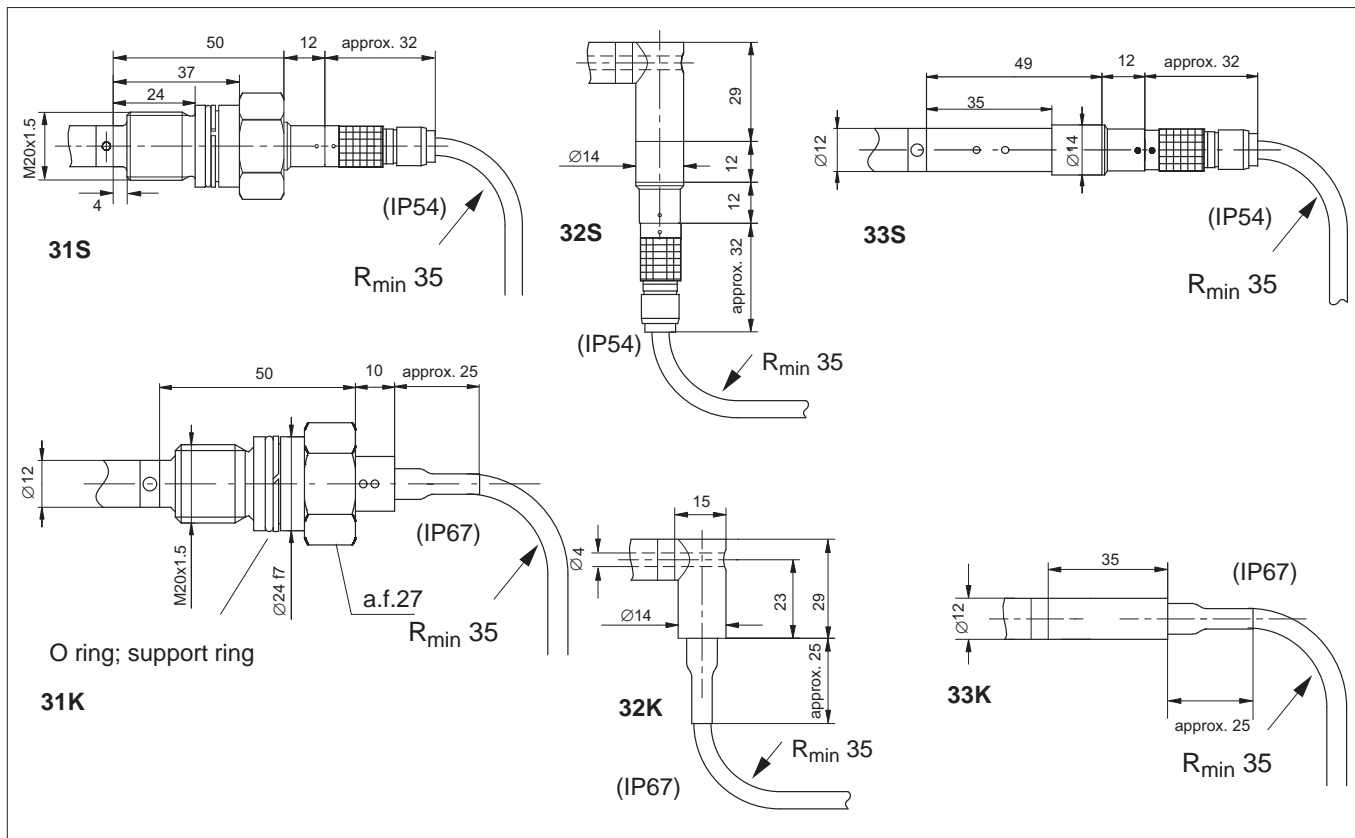

Principle of measurement, wiring assignment

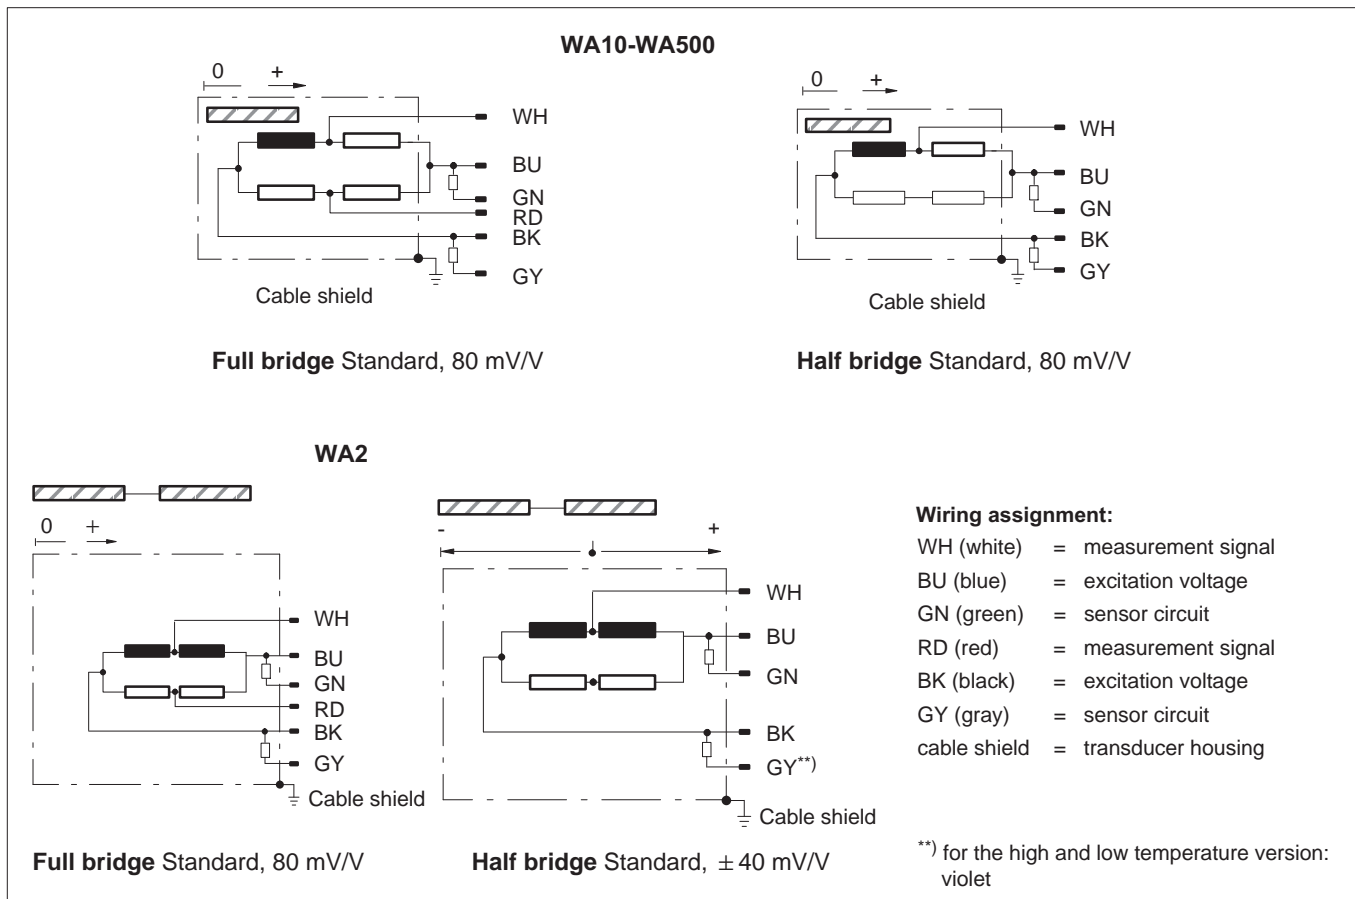


Options for WA

K-WA		Configurable displacement transducer WA		
1	Code	Option 1: Version		
	L	Detachable plunger, standard version		
	M	Detachable plunger, high temperature version up to max. 150°C		
	T	Displacement probe, standard version		
	U	Displacement probe, high temperature version up to max. 150 °C		
	X ¹⁾	Displacement probe, low temperature version for -40°C... 125°C		
2	Code	Option 2: Measuring range	Option = 1	
			T/U/X	L/M
	002W	2 mm	x	x
	010W	10 mm	x	x
	020W	20 mm	x	x
	050W	50 mm	x	x
	100W	100 mm	x	x
	200W	200 mm		x
	300W	300 mm		x
	500W	500 mm		x
3	Code	Option 3: Type of connection at the transducer		
	31K	Pressure-resistant, M20x1.5 + fixed cable, IP67		
	32K	90°, fixed cable, IP67		
	33K	0°, fixed cable, IP67		
	31S	Pressure-resistant, M20x1.5 + LEMO plug connection		
	32S	90°, LEMO male connector		
	33S	0°, LEMO male connector		
4	Code	Option 4: Cable type	Option 1 =	
			L/T	M/U/X
	SD	PVC cable	x	
	HT	PTFE cable, max. 150° C		x
5	Code	Option 5: Cable ends		
	D1	DB-15P male connector	with option 7 = 8 only	
	D2	DB-15P male connector with TEDS	with option 7 = 8 only	
	F1	Free ends		
	M1	MS 3106PEMV male connector	with option 7 = 8 only	
	M2	MS male connector with TEDS	with option 7 = 8 only	
	Q1	Sub-HD male connector	with option 7 = 8 only	
	Q2	Sub-HD male connector with TEDS	with option 7 = 8 only	
6	Code	Option 6. Non-linearity		
	2	0.2%		
	1	0.1%	not with option 2 = 010W / not with option 7 = 2	
7	Code	Option 7: Rated output		
	8	80mV/V full bridge circuit		
	2	Output 0.5...10V; WA electronics PVC cable to the evaluator	with option 5 = F1 + option 6 = 2	
8	Code	Option 8: Cable length at transducer		
	3.00	3.00 m		
	6.00	6.00 m		
	10.00	10.00 m		
	20.00	20.00 m		
9	Code	Option 8: Cable length at WA electronics		
			only with option 7 = 2	
	1.00	1.00 m		
	3.00	3.00 m		
	6.00	6.00 m		
	10.00	10.00 m		

¹⁾ A reduced number of load cycles is to be expected.

Example:



Devices can be supplied in the standard version from stock at short notice.

Scope of supply: displacement transducer, test record, 20 mm probe pin extension, operating manual

Standard displacement transducer WA

Version	Probe version	Plunger
Measuring range	Order no.	Order no.
0 ... 2 mm	1-WA/2MM-T	1-WA/2MM-L
0 ... 10 mm	1-WA/10MM-T	1-WA/10MM-L
0 ... 20 mm	1-WA/20MM-T	1-WA/20MM-L
0 ... 50 mm	1-WA/50MM-T	1-WA/50MM-L
0 ... 100 mm	1-WA/100MM-T	1-WA/100MM-L
0 ... 200 mm		1-WA/200MM-L
0 ... 300 mm		1-WA/300MM-L
0 ... 500 mm		1-WA/500MM-L

Accessories

Mounting set WS/ZB12

1. Fitting suggestion

WS/ZB12
 2 mounting blocks with countersink Km4 DIN 74
 1 mounting block with thread M4

2. Fitting suggestion

4 fillister-head screws M4x25, DIN 912
 2 fillister-head screws M4x40, DIN 912

3. Fitting suggestion

1 hexagonal-head bolt spanner a.f.
 3

Operating temperature range from -40 °C...+80 °C

Replacement parts

- Lemo connector, detachable (6-pin, 3-3312.0126 for 80 mV/V)
- Measurement insert with carbide ball (3-6061.0003)

Subject to modifications.
 All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

Hottinger Brüel & Kjaer GmbH
 Im Tiefen See 45 · 64293 Darmstadt · Germany
 Tel. +49 6151 803-0 · Fax +49 6151 803-9100
 Email: info@hbm.com · www.hbm.com